ATN


NEW


PIAF 12E


Mast-style boom lift PIAF 12E



www.atnplatforms.com

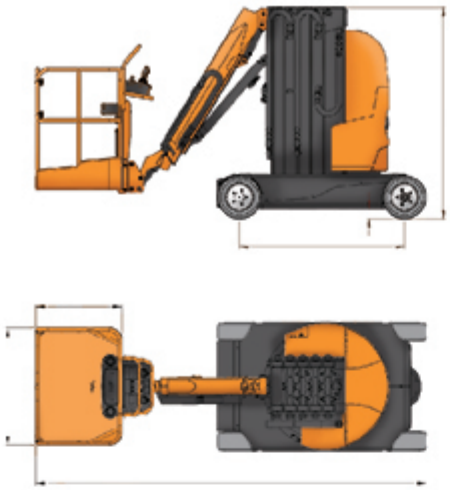

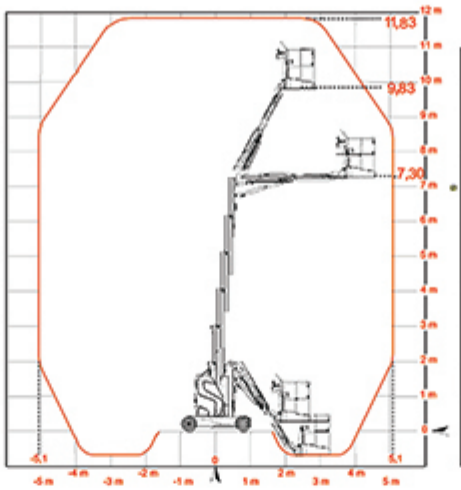

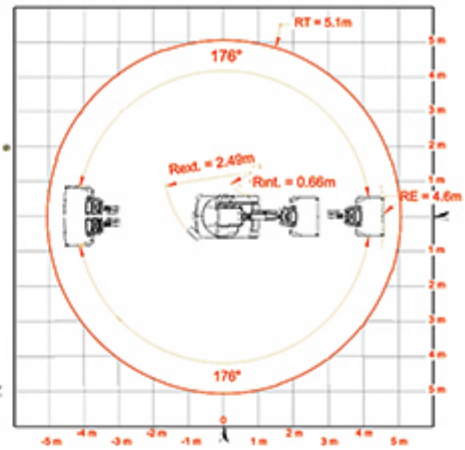

PIAF 12E

ADVANTAGES :

- 5.10m horizontal outreach
- 30% gradeability
- Zero tailswing
- Rotation 2x176°
- A/C electric drive
- Electric and smooth operating system
- Designed and manufactured for heavy duty use
- Easy maintenance

STANDARD FEATURES :

- Non marking solid tires
- Battery 48V 260Ah
- Centralised battery filling
- On board charger H/F
- Access to platform through a gate
- Tilt indicator with buzzer
- Overload indicator
- Steel frame and fiberglass covers
- Flashing light
- Motion alarm
- Slinging and lifting lugs
- On board colour LCD diagnostic console
- Hour meter
- Battery charge indicator

OPTIONS :

- Air line to platform
- 110 or 220V plug in the basket
- ACS (Anti-Crushing System)
- Special customer paint
- Gel battery with charger
- Food compatible oil
- Biodegradable oil

		PIAF 12E
	Working height	11.83 m (38 ft. 81 in.)
	Platform height	9.83 m (32 ft. 25 in.)
	Horizontal reach	5.1 m (16 ft. 73 in.)
	Lift capacity (2 persons, wind <28 mph)	200 Kg (441 lbs.)
	Turntable rotation	352 °
A	Platform width	1.1 m (3 ft. 61 in.)
B	Platform length	0.8 m (2 ft. 63 in.)
C	Length	3.66 m (12 ft. 01 in.)
D	Wheelbase	1.55 m (5 ft. 09 in.)
E	Width	1.2 m (3 ft. 94 in.)
F	Height - stowed	1.98 m (6 ft. 50 in.)
G	Ground clearance	0.1 m (0 ft 33 in.)
	Turning radius - inside	0.66 m (2 ft. 17 in.)
	Turning radius - outside	2.49 m (8 ft. 17 in.)
	Drive speed - stowed	6 Km/h (3.73 Mph)
	Drive speed - raised	0.8 Km/h (0.50 Mph)
	Maximum tilt value	2 °
	Weight	4350 Kg ((9590 lbs.)
	Gradeability * - stowed	30 %
	Max.ground bearing pressure	1569 kN/m²

CE This product complies with European regulations in force (EN 280). Due to our constant improvement policy, ATN reserves the right to make any modifications without any prior notice.



Rue André Thevet,
Z.I.Guillaume Mon Amy Faullet 47400 FRANCE
+33 (0) 553 798 320 +33 (0) 553 880 107
http://www.atnplatforms.com

Copyright ATN 12/2015 FTATNPIAF12Een